


SERIES

SCW

OVERLY
DOOR COMPANY


574 WEST OTTERMAN STREET
POST OFFICE BOX 70
GREENSBURG, PA 15601-0070
TELEPHONE: 724-834-7300
FAX: 724-830-2871

**MODEL NO. 4696241 / FIRE RATED / STC 46 / WOOD / SOUND
CONTROL DOOR AND FRAME ASSEMBLY / DOUBLE BUBBLE SEALS**

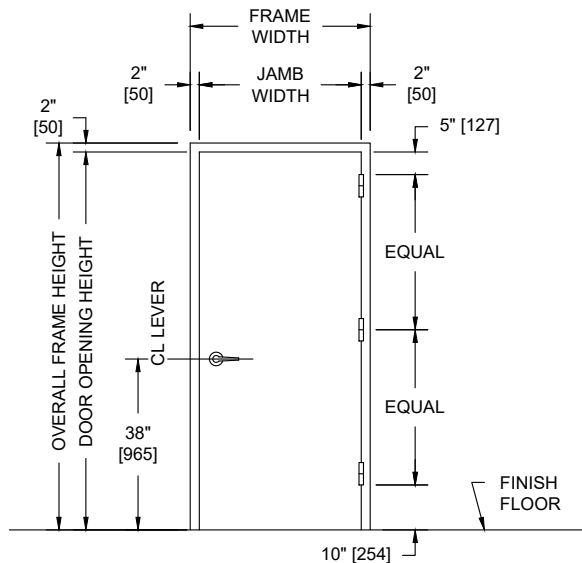


PUBLIC SIDE ELEVATION
RIGHT HAND REVERSE BEVEL SHOWN


SECURED AREA (INTERIOR)



**(KEY) SIDE
PUBLIC AREA (EXTERIOR)**

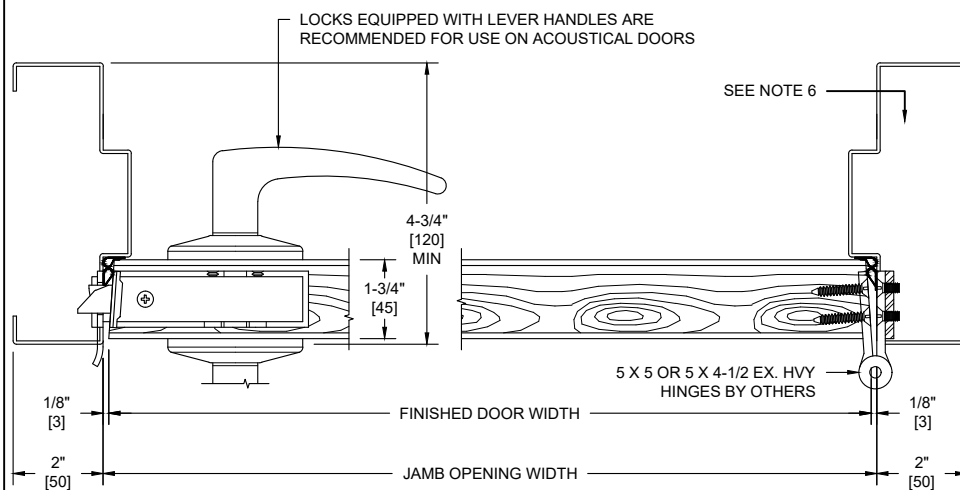

HORIZONTAL SECTION

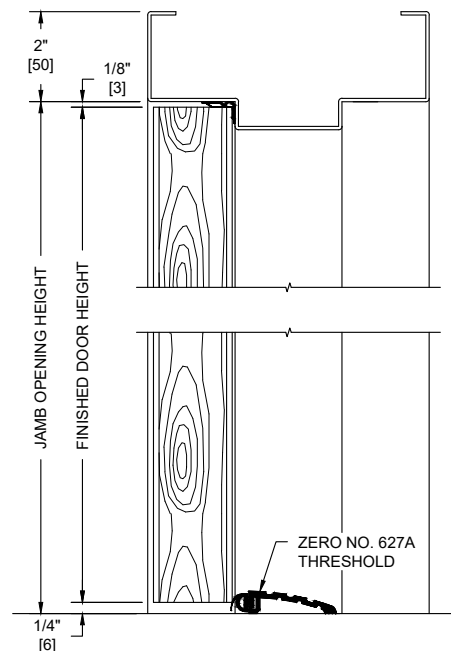

VERTICAL SECTION

NOTES:

1. All exposed surfaces of frame to receive one coat of rust inhibitive prime paint.
2. A Zero no. 627A threshold is required for sealing bottom of door. Do not mount threshold over carpet.
3. Frame is equipped with double bubble seals at head and jambs.
4. Door weight is 7.9 pounds per square foot.
5. Door can be equipped with standard builders hardware, Customer to specify. No concealed or electrically operated hardware is permitted.
6. Frames equipped with masonry anchors must be grouted full in field. Bolt-in type frames must have all voids in head and jambs packed with 6 to 12 pound density mineral wool and all voids between wall and frame continuously caulked.
7. Wood species, cut and finish to be determined by the Architect.
8. Unit tested as single door at Riverbank Acoustical Laboratories. Results are described in Test Report No. TL97-19 with sound transmission results as shown in chart below.
9. Maximum leaf size 4' x 10' available. Up to 4' x 8' single swing units can bear up to 45 min UL 10C fire label with up to 1,296 sq. in. vision light. Doors swinging in pairs cannot be fire labeled unless provided with a mullion.
10. Door construction is covered by US Patent No. 6,112,496.

SOUND TRANSMISSION LOSS IN dB AT FREQUENCY / HERTZ

100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
25	25	30	33	36	41	40	42	47	47	48	49	50	50	50	51	52	55

ALL DIMENSIONS
BOTH IN INCHES
AND MILLIMETERS