

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

SPONSOR: **Overly Door Company**
Greensburg, PA

Sound Transmission Loss
RAL™-TL25-453

CONDUCTED: 2025-10-02

Page 1 of 10

ON: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom

TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E90-09 (2016): "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." The single number rating of the specimen was calculated according to ASTM E413-22: "Classification for Rating Sound Insulation." A description of the measurement procedure and room specifications is available upon request. The transmission loss values are for a single direction of measurement. The results presented in this report apply to the sample as received from the test sponsor.

INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom. The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

Product Under Test

Product Name: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom
Manufacturer: Overly Door Company

SPECIMEN MEASUREMENTS & TEST CONDITIONS

Through a full external visual inspection performed on the test specimen, Riverbank personnel verified the following specimen properties:

Door Frame

Materials: Metal door frame, concrete casting at perimeter
Dimensions: Overall @ 1194 mm (47 in.) wide by 2413 mm (95 in.) high
Door frame @ 1013 mm (39.875 in.) wide by 2162 mm (85.125 in.) high
Depth: 194 mm (7.625 in.)
Overall Weight: 498.04 kg (1098 lbs)



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-453

Page 2 of 10

Overly Door Company
2025-10-02

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

Door Leaf

Materials: Metal exterior, level swing metal hinges, metal lock, and door handle
Dimensions: 908 mm (35.75 in.) wide by 2127 mm (83.75 in.) high
Thickness: 46 mm (1.8125 in.)
Installation: Suspended from jamb of door frame via three (3) hinges
Door opens into source room
Overall Weight: Door leaf @ 117.59 kg (259.25 lbs)
Hinges @ 2.04 kg (4.5 lbs) total
Door handle and lockset @ 2.04 kg (4.5 lbs)

Additional Door Hardware

Retainers

Materials: Metal angled pieces
Installation: Fastened to perimeter of door frame
Overall Weight: 5.56 kg (12.25 lbs)

1" H Seal Gasket

Materials: 1" H Seal Gasket
Installation: Fit into retainers
Overall Weight: 0.34 kg (0.75 lbs)

Door Bottom

Materials: Semi Mortise Automatic Door Bottom
Installation: Fastened to receive side bottom edge of door leaf with screws
Overall Weight: 1.13 kg (2.5 lbs)

Note: The specimen was fully opened and closed five (5) times immediately prior to testing in order to demonstrate operability. No further adjustments were made to the specimen.



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)**Overall Specimen Measurements**

Dimensions: 1.01 m (39.875 in) wide by 2.16 m (85.125 in) high
Thickness: 0.19 m (7.625 in)
Weight: 626.75 kg (1381.75 lbs)
Overall Area: 2.19 m² (23.57 ft²)
Mass per Unit Area: 286.2 kg/m² (58.62 lbs/ft²)

Test Aperture

Opening Size: 1.22 m (4.0 ft.) by 2.44 m (8.0 ft.)
Filler Wall: Yes
Aperture Size: 1.01 m (39.875 in) wide by 2.16 m (85.125 in) high
Transmission Area: 2.19 m² (23.57 ft²)
Sealed: Entire periphery (both sides) with dense mastic
Joints where retainers meet door frame sealed with mastic on receive room side
Joints where door leaf and frame meet left unsealed

**Note: The dimensions used to determine the transmission area exclude those of the concrete-filled frame into which the door frame was cast. Given that the transmission loss performance of massive solid partitions is expected to be considerably greater than that of operable doors, the amount of flanking sound transmission through the mastic-covered concrete is assumed to be negligible. The specimen dimensions reflect this assumption.*

Test Environment**Source Room**

Volume: 178.33 m³
Temperature: 22.2 °C ± 0.0 °C
Relative Humidity: 56.0 % ± 0.0 %

Receive Room

Volume: 131.02 m³
Temperature: 22.8 °C ± 0.0 °C
Relative Humidity: 56.0 % ± 0.0 %

Requirements

Temperature: 22° C +/- 2° C, not more than 3° C change over all tests.
Relative Humidity: ≥ 30%, not more than +/- 3% change over all tests.

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

Overly Door Company
2025-10-02

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-453

Page 4 of 10



Figure 1 – Specimen mounted in test aperture, as viewed from source room (left) and receive room (right)



Figure 3 – Specimen door leaf installed, detail of door bottom

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY

WALLACE CLEMENT SABINE

RAL™-TL25-453

Page 5 of 10

Overly Door Company

2025-10-02

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequency bands. A graphic presentation of the data and additional information appear on the following pages. The precision of the transmission loss test data is within the limits set by the ASTM Standard E90-09 (2016). See Appendix A for identification of corrections applied to the reported data.

<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>
100	27	0.50	0	800	46	0.23	4
125	31	0.93	1	1000	46	0.15	5
160	36	0.60	0	1250	46	0.09	6
200	38	0.84	0	1600	49	0.13	3
250	42	0.68	0	2000	51	0.11	1
315	44	0.36	0	2500	54	0.12	0
400	45	0.22	2	3150	54	0.10	0
500	45	0.22	3	4000	52	0.06	0
630	45	0.23	4	5000	51	0.07	0

STC=48

ABBREVIATION INDEX

FREQ. = 1/3 OCTAVE BAND CENTER FREQUENCY, Hz

TL = TRANSMISSION LOSS, dB

ΔTL = 95% CONFIDENCE INTERVAL FOR TL MEASUREMENTS, dB

DEF. = DEFICIENCIES, dB BELOW SHIFTED STC CONTOUR (SUM OF DEF = 29)

STC = SOUND TRANSMISSION CLASS

Tested by




Keith Kimberling
Test Engineer

Report by



Keith Kimberling
Test Engineer

Approved by



Eric P. Wolfram
Laboratory Manager



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report


www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE
RAL™-TL25-453
Page 6 of 10

Overly Door Company
2025-10-02

SOUND TRANSMISSION REPORT

Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door
Bottom

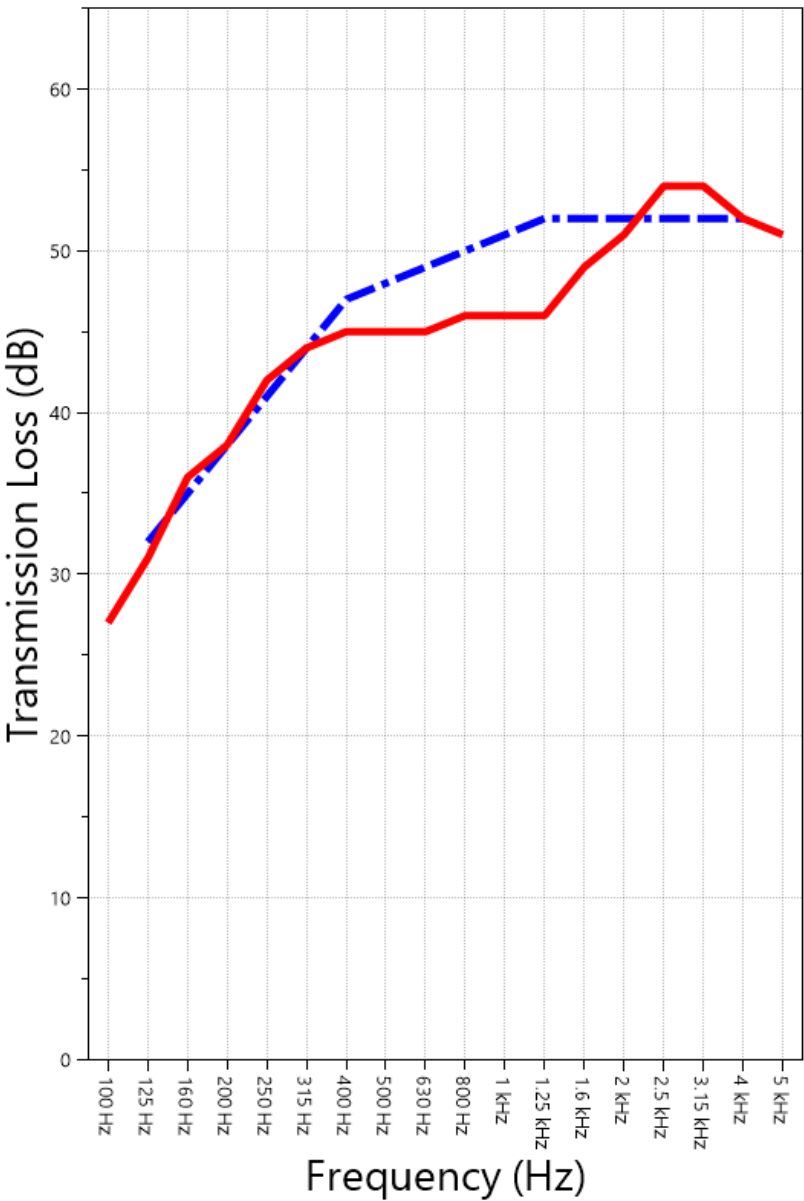

STC=48

OITC=37



TRANSMISSION LOSS
SOUND TRANSMISSION CLASS CONTOUR



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-453

Page 7 of 10

Overly Door Company
2025-10-02

APPENDIX A: Extended Frequency Range Data

Specimen: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom
(See Full Report)

The following non-accredited data were obtained in accordance with ASTM E90-09 (2016), but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes. Sampling precision observed during this procedure is reported below. Corrections are detailed in Appendix B.

1/3 Octave Band Center Frequency (Hz)	Sound Transmission Loss (dB)	Applicable Corrections	Δ TL (Eq. A2.5) (dB)	Repeatability (dB)
31.5	25	<i>A F</i>	1.05	1.24
40	28		0.53	1.44
50	23		0.96	0.98
63	22		1.22	2.33
80	20		1.48	1.46
100	27		0.50	0.77
125	31		0.93	1.28
160	36		0.60	1.18
200	38		0.84	0.74
250	42		0.68	0.53
315	44		0.36	0.46
400	45		0.22	0.41
500	45		0.22	0.41
630	45		0.23	0.32
800	46		0.23	0.30
1000	46		0.15	0.29
1250	46		0.09	0.15
1600	49		0.13	0.18
2000	51		0.11	0.12
2500	54		0.12	0.28
3150	54		0.10	0.23
4000	52		0.06	0.18
5000	51		0.07	0.26
6300	52		0.15	0.28
8000	51		0.17	0.67
10000	50	<i>F</i>	0.21	0.93
12500	53	<i>A F</i>	0.27	1.93



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL25-453

Page 8 of 10

Overly Door Company
2025-10-02

APPENDIX B: Glossary of Standardized Corrections and Adjustments

Specimen: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom
(See Full Report)

Mark Interpretation

- A*** Measured sound pressure levels in the receive room are within 10 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.
- AA*** Measured sound pressure levels in the receive room are within 5 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.1. Transmission Loss values calculated from levels corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and a receive room with idealized ambient sound levels of $(-\infty)$ dB.
- F*** The reported Transmission Loss is within 10 dB of the laboratory flanking limit at the marked frequency band. The measured performance of the specimen may be limited by the performance of the laboratory building structure at this frequency band.
- Z*** The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.7 to account for possible sound transmission through the filler assembly.
- ZZ*** The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.8 to account for possible sound transmission through the filler assembly. Transmission Loss values corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and an idealized filler assembly with a Sound Transmission Class rating of (∞) .

APPENDIX C: Glossary of Variability Metrics

Specimen: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom
(See Full Report)

Δ TL, the 95% confidence interval for reported transmission loss values, is calculated from the standard deviation of the sets of measurements for source room sound pressure level, receive room sound pressure level, and receive room sound absorption. This metric is calculated in an effort to quantify the combined influences of room geometry, microphone positioning, and other varying environmental conditions on reported results.

Repeatability, expressed as a 95% confidence interval, is calculated from the standard deviation of transmission loss as obtained from a set of six (6) consecutive tests conducted according to this test method by RAL on 2020-02-24. The tests were performed on a specimen composed of welded aluminum tubing, using the same test opening as used in this report. This metric provides an estimate of the variation in results that might be observed if the test were repeated with no change to the installed specimen. Note that repeatability will vary with the construction type.



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Overly Door Company
2025-10-02

RAL™-TL25-453

Page 9 of 10

APPENDIX D: Determination of Outdoor Indoor Transmission Class (OITC)

Specimen: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom (See Full Report)

The determination of the Outdoor Indoor Transmission Class (OITC) as reported below was made with explicit conformity to the procedures described in the ASTM E1332-22 test standard. Test Method ASTM E90-09 (2016) was used to obtain the sound transmission loss data. This rating is based on an average transportation noise source spectrum and an A-weighted sound level reduction, either of which may be inappropriate for some applications.

One-third Octave Band Center Frequency, Hz	Reference Sound Spectrum, dB	Test Specimen Transmission Loss, dB
80	103	20
100	102	27
125	101	31
160	98	36
200	97	38
250	95	42
315	94	44
400	93	45
500	93	45
630	91	45
800	90	46
1000	89	46
1250	89	46
1600	88	49
2000	88	51
2500	87	54
3150	85	54
4000	84	52

OITC = 37



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE
RAL™-TL25-453
Page 10 of 10

Overly Door Company
2025-10-02

APPENDIX E: Instruments of Traceability

Specimen: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom
(See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 2	3160-A-042	3160-106974	2025-08-20	2026-08-20
Bruel & Kjaer Mic And Preamp C	Type 4943-B-001	2311439	2025-04-11	2026-04-11
Bruel & Kjaer Pistonphone	Type 4228	2781248	2025-07-21	2026-07-21
EXTECH Hygro 639	SD700	A.103639	2024-12-10	2025-12-10

APPENDIX F: Revisions to Original Test Report

Specimen: Overly Model STC4825453 flush steel door assembly with H seals and Automatic Door Bottom (See Full Report)

<u>Date</u>	<u>Revision</u>
2025-10-14	Original report issued

END