


# OVERLY

## DOOR COMPANY

### BULLET RESISTANT DOOR DATA SHEET

574 WEST OTTERMAN STREET  
 GREENSBURG, PA 15601-0070  
 TELEPHONE: (724) 834-7300  
 FAX: (724) 830-2871

CUSTOMER: \_\_\_\_\_ APPROVED BY: \_\_\_\_\_  
 JOB: \_\_\_\_\_ DATE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_ SALES ORDER: \_\_\_\_\_ ITEM: \_\_\_\_\_  
 CUSTOMER PO: \_\_\_\_\_ MARK NUMBER 1: \_\_\_\_\_ ADDITIONAL MARKS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

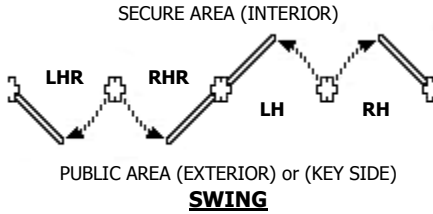

**SWING**

**DOOR INFORMATION**


NUMBER OF LEAFS: \_\_\_\_\_  
 DOOR SWING: \_\_\_\_\_  
 MATERIAL: \_\_\_\_\_  
 PRIMER: \_\_\_\_\_  
 (N) CENTER LINE (A.F.F.): \_\_\_\_\_"  
 CENTER LINE BASED ON:  
 LEVER  DEVICE  STRIKE  
 CROSS BAR  LOCK  MFG STD  
 NOTE: If no choice is selected, the center line will be based on manufacturer's specifications.

**VISION LIGHT INFORMATION**


NO VISION LIGHTS REQUIRED  
 (J) VISION LIGHT WIDTH: \_\_\_\_\_"  
 (K) VISION LIGHT HEIGHT: \_\_\_\_\_"  
 (L) HORIZONTAL CL: \_\_\_\_\_"  
 (M) VERTICAL CL: \_\_\_\_\_"  
 GLASS PROVIDED BY:  OVERLY  OTHERS

**MAXIMUM LIGHT SIZES**


NOTE: NO VISION LIGHTS WITH U.L. FIRE LABELS



**MINIMUM STILES**



**FRAME CONFIGURATION**



**FRAME PROFILE**

**UL 752 LEVEL**

- 1 - MPSA (MEDIUM POWER SMALL ARMS)
- 2 - HPSA (HIGH POWER SMALL ARMS)
- 3 - SPSA (SUPER POWER SMALL ARMS)
- 4 - HPR (HIGH POWER RIFLE)

**FIRE RATING**


No Label  
 UL LABEL:  3 HR  1-1/2 HR  3/4 HR  20 MIN  
 UL PROCEDURE:  UL10B  UL10C  N/A  
 NOTE: No vision lights allowed with U.L. fire labels.

**SILL INFORMATION**


SILL CONDITION: \_\_\_\_\_  
 UNDERCUT: \_\_\_\_\_"

**FRAME INFORMATION**

FRAME CONFIGURATION: \_\_\_\_\_  
 FRAME ANCHORAGE: \_\_\_\_\_  
 (A) JAMB OPENING WIDTH: \_\_\_\_\_"  
 (B) JAMB OPENING HEIGHT: \_\_\_\_\_"  
 (C) JAMB DEPTH: \_\_\_\_\_"  
 (D) WALL THICKNESS: \_\_\_\_\_"  
 (E) JAMB TRIM: \_\_\_\_\_"  
 (F) HEAD TRIM: \_\_\_\_\_"  
 ROUGH OPENING: \_\_\_\_\_"  
 WALL TYPE:  
 METAL STUD \*  WOOD STUD  
 MASONRY/CMU  CHANNEL/TUBE STEEL  
 \*SPLIT AND EWA ONLY: Wood blocking must be placed behind metal studs.

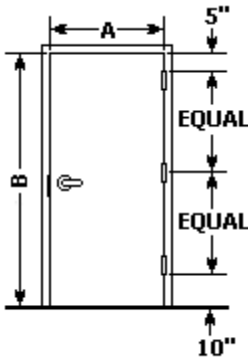

**FRAME ELEVATION**



**DOOR ELEVATION**

**HARDWARE**

By: Overly Others


_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>

**ADDITIONAL NOTES:**

\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

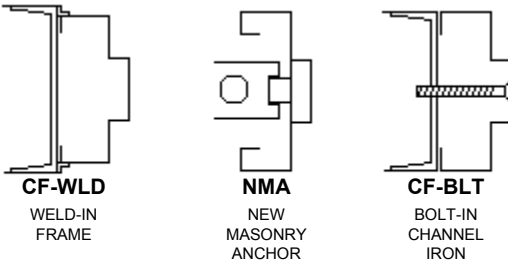


**CF-WLD**  
WELD-IN FRAME

**NMA**  
NEW MASONRY ANCHOR

**CF-BLT**  
BOLT-IN CHANNEL IRON




**EWA**  
EXISTING WALL ANCHOR



**SPLIT**  
SPLIT FRAME

**FRAME ANCHORAGE**

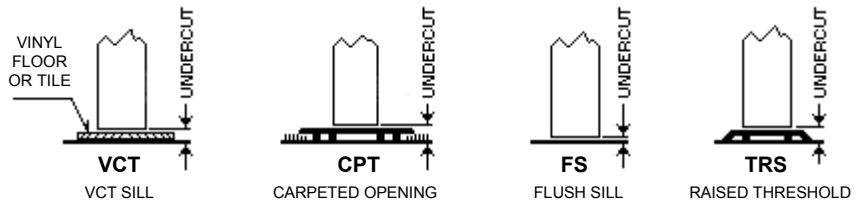

\*\*\*BOTTOM LINE DENOTES BOTTOM OF FRAME AT ALL CONDITIONS\*\*\*

**SILL CONDITION**