




351 HARVEY AVE, SUITE B
GREENSBURG, PA 15601
TELEPHONE: (724) 834-7300
www.overly.com

ACOUSTICAL WOOD DOOR DATA SHEET

CUSTOMER: _____	APPROVED BY: _____
JOB: _____	DATE: _____
LOCATION: _____	SALES ORDER: _____ ITEM: _____
CUSTOMER PO: _____	MARK NUMBER 1: _____
_____	_____
_____	_____
_____	_____
_____	_____


SECURE AREA (INTERIOR)



PUBLIC AREA (EXTERIOR) or (KEY SIDE)

SWING

MAXIMUM LIGHT
SIZES WITH U.L. FIRE LABEL
¾ HOUR - 1296 in.²



MINIMUM STILES




SI
SLIP - IN




WA
WRAP
AROUND

FRAME CONFIGURATION




SIDE JAMB




HEAD JAMB


FRAME PROFILE

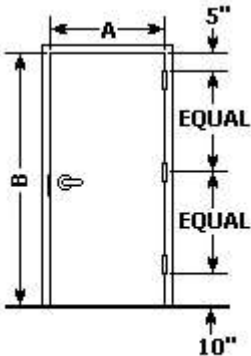


FRAME ELEVATION




DOOR ELEVATION




SPLIT
SPLIT FRAME




EWA
EXISTING
WALL ANCHOR




SPECIAL
CUSTOMER TO
PROVIDE SKETCH



NSA
NEW STUD
WALL ANCHOR



NMA
NEW MASONRY
ANCHOR



KD
KNOCKDOWN
FRAME

FRAME ANCHORAGE

DOOR INFORMATION

MODEL NUMBER: _____
NUMBER OF LEAFS: _____
DOOR SWING: _____
REQUESTED STC: _____
(N) CENTER LINE (A.F.F.): _____"
CENTER LINE BASED ON:
☐ LEVER ☐ DEVICE ☐ STRIKE
☐ CROSS BAR ☐ LOCK ☐ MFG STD
NOTE: If no choice is selected, the center line will be based on manufacturer's specifications.

FIRE RATING

☐ No Label
UL LABEL: ☐ ¾ HOUR
NOTE: Label available up to 4' x 8' max leaf size.
All UL rated openings will meet the UL10C procedure.

SILL INFORMATION

SILL CONDITION: _____
(G) FLOORING THICKNESS: _____"
(H) THRESHOLD THICKNESS: _____"

VENEER INFORMATION

VENEER: _____
FINISH: _____
CUT: _____
VENEER MATCHING: _____
ASSEMBLY MATCHING: _____
☐ FSC/COC REQUIRED? ☐ N/A

VISION LIGHT INFORMATION

☐ NO VISION LIGHTS REQUIRED
(J) VISION LIGHT WIDTH: _____"
(K) VISION LIGHT HEIGHT: _____"
(L) HORIZONTAL CL: _____"
(M) VERTICAL CL: _____"
GLASS PROVIDED BY: ☐ OVERLY ☐ OTHERS

FRAME INFORMATION

FRAME MATERIAL: _____
FRAME PRIMER: _____
FRAME CONFIGURATION: _____
FRAME ANCHORAGE: _____
(A) JAMB OPENING WIDTH: _____"
(B) JAMB OPENING HEIGHT: _____"
(C) JAMB DEPTH: _____"
(D) WALL THICKNESS: _____"
(E) JAMB TRIM: _____"
(F) HEAD TRIM: _____"
ROUGH OPENING: * _____"

*Not required for NSA or NMA frame anchorage.

WALL TYPE:

☐ METAL STUD ** ☐ WOOD STUD
☐ MASONRY/CMU ☐ CHANNEL/TUBE STEEL


**SPLIT AND EWA ONLY: Wood blocking must be placed behind metal studs.

HARDWARE


By: Overly Others

_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>

ADDITIONAL NOTES:




FS
FLUSH SILL



CPT
CARPETED OPENING



VCT
VCT SILL



TRS
RAISED THRESHOLD

BOTTOM LINE DENOTES BOTTOM OF FRAME AT ALL CONDITIONS

SILL CONDITION