



## UL752 LEVEL 3, FLUSH, UP TO 3 HOUR UL FIRE RATED SINGLE SWING METAL FRAME AND DOOR ASSEMBLY

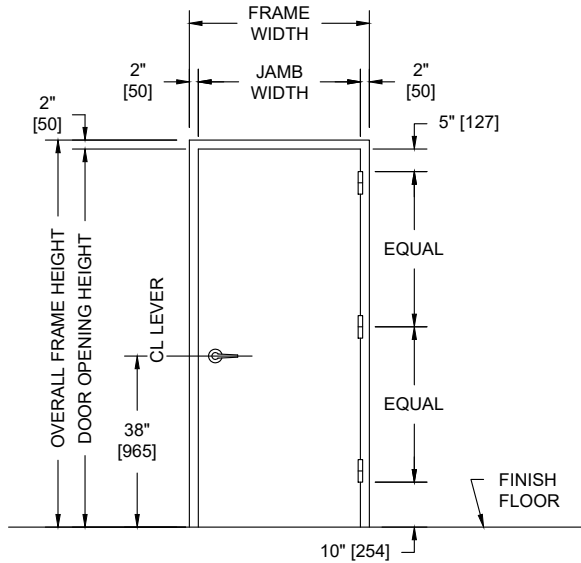

**PUBLIC SIDE ELEVATION**  
RIGHT HAND REVERSE BEVEL SHOWN


**SECURED AREA (INTERIOR)**




**(KEY) SIDE**  
**PUBLIC AREA (EXTERIOR)**

**NOTES:**

- Both door and frame UL listed for UL752, Level 3 bullet resistance.
- Door and Frames can be fabricated from carbon or galvanized steel. All exposed surfaces of frame to receive one coat of rust inhibitive prime paint.
- Units can be UL fire rated up to 3 hours in accordance with UL standard 10C.
- Maximum door leaf size is 4'-0" x 10'-0".
- Door weight is 11.7 pounds / sq. foot.
- Doors recommended to be hung on 5" heavy weight or continuous hinges. Locks required to be BHMA Grade 1, 2, or 3. Electrical hardware with raceways available. Consult factory for specifics.

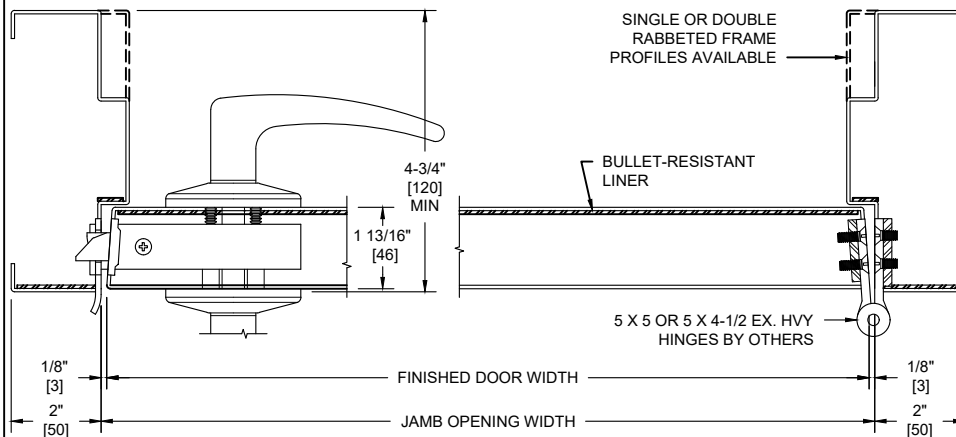

**HORIZONTAL SECTION**

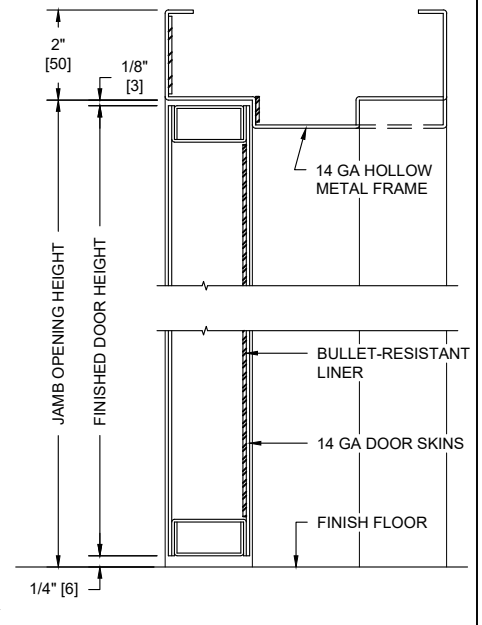

**VERTICAL SECTION**

UL LEVEL	AMMUNITION	MINIMUM VELOCITY FPS/MP5	NUMBER OF SHOTS
3	.44 MAGNUM LEAD SEMI-WADCUTTER GAS CHECKED	1350 / 411	3