



MODEL NO. 389227 / STC 38 / SINGLE GLAZED / SOUND CONTROL FIXED WINDOW ASSEMBLY / NEOPRENE GLAZING

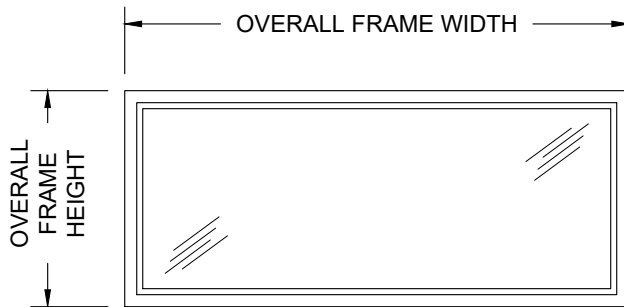

ELEVATION

NOTES:


1. All exposed surfaces of frame to receive one coat of rust inhibitive prime paint.
2. Unit weight, including frame, glass, and glazing, is 19.0 pounds per square foot.
3. Frames equipped with masonry anchors must be grouted full in field. Bolt-in type frames must have all voids in head, jambs, and sill packed with 6 to 12 pound density mineral wool.
4. All voids between wall and frame must be continuously caulked.

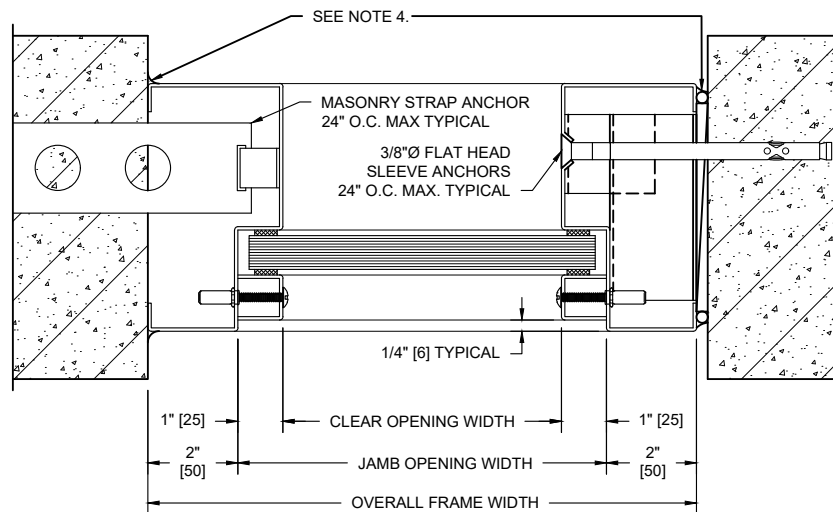

**SHOWING BUILT-IN INSTALLATION
IN MASONRY PARTITION**

**SHOWING BOLT-IN INSTALLATION
IN MASONRY PARTITION**

HORIZONTAL SECTION

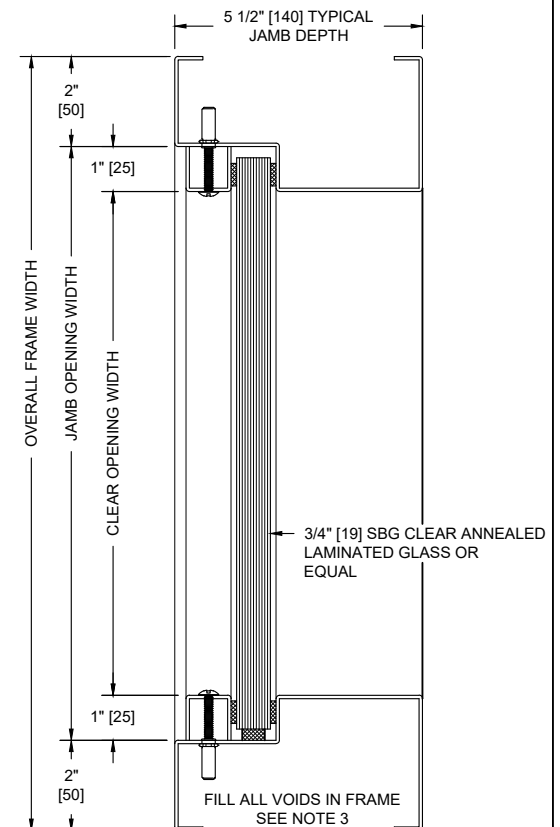

VERTICAL SECTION

SOUND TRANSMISSION LOSS IN dB AT FREQUENCY / HERTZ																
100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000
32	32	32	32	33	33	36	36	36	33	33	39	43	46	49	51	56

ALL DIMENSIONS
BOTH IN INCHES
AND MILLIMETERS