



UL LEVEL 5 METAL BULLET RESISTANT GLAZING AND ASTRAGAL SYSTEMS

IF GLASS BY OVERLY:
UL LEVEL 5 GLASS CLAD
POLYCARBONATE SHIPPED
LOOSE OR FACTORY INSTALLED


IF GLASS BY OTHERS: GLAZING
MUST BE UL LEVEL 5, NO
GREATER THAN 1-1/2" THICK,
AND THICKNESS SPECIFIED AT
TIME OF ORDER

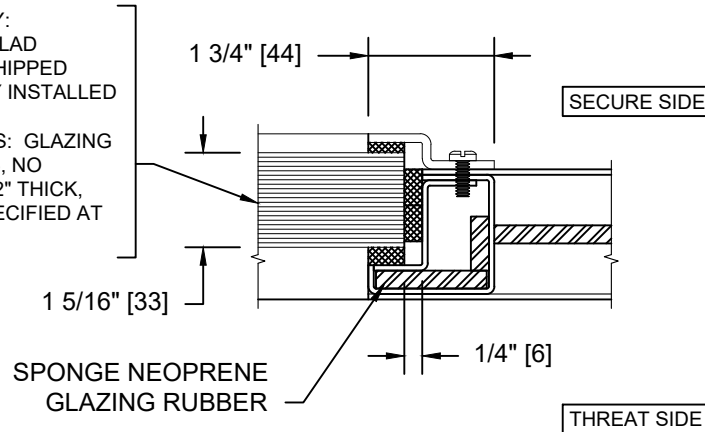

UL LEVEL 5 GLAZING REQUIREMENTS

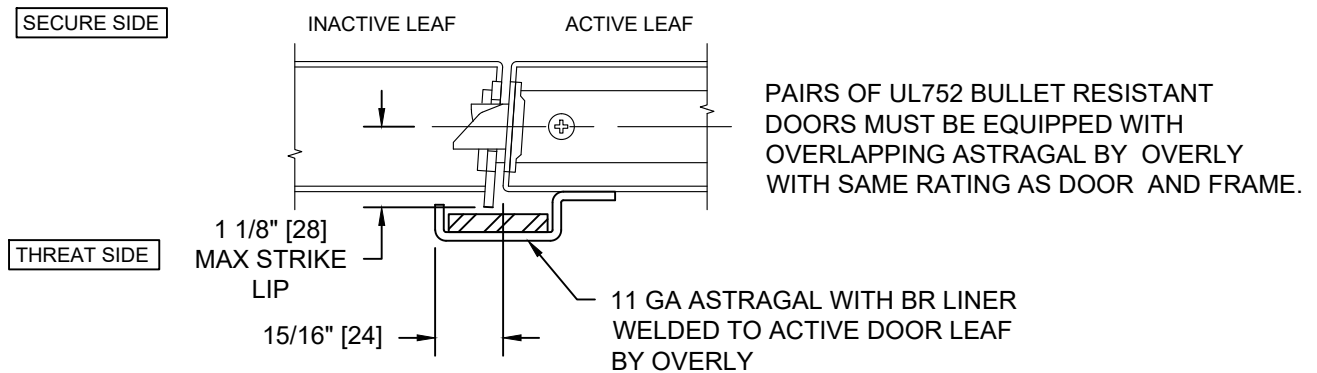

UL LEVEL 5 ASTRAGAL DETAIL REVERSE BEVEL SWING

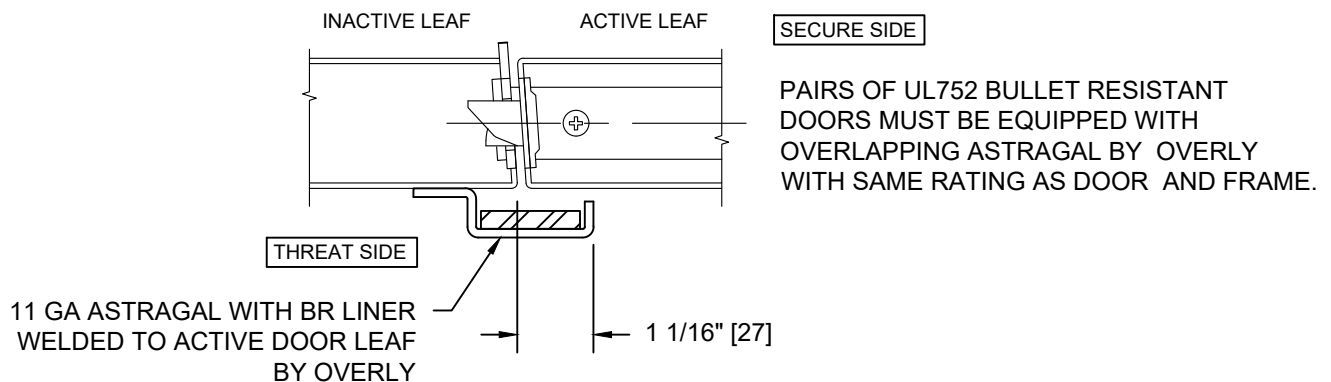

UL LEVEL 5 ASTRAGAL DETAIL REGULAR SWING