



UL752 LEVEL 4, FLUSH, UP TO 3 HOUR FIRE RATED SINGLE SWING METAL FRAME AND DOOR ASSEMBLY

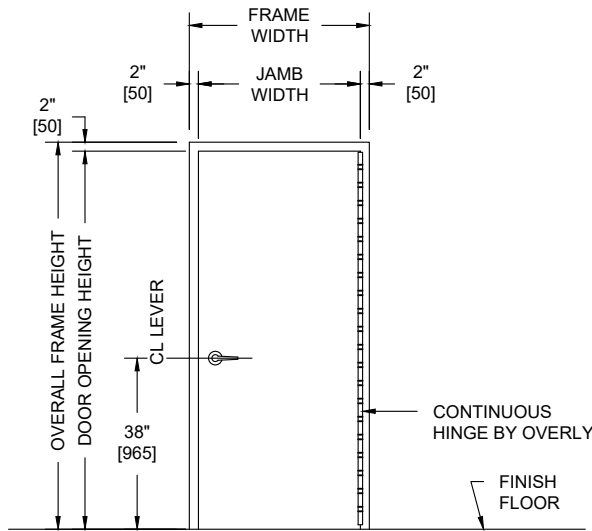

PUBLIC SIDE ELEVATION
RIGHT HAND REVERSE BEVEL SHOWN


SECURED AREA (INTERIOR)




(KEY) SIDE
PUBLIC AREA (EXTERIOR)

NOTES:

- Both door and frame UL listed for UL752, Level 4 bullet resistance.
- Door and Frames can be fabricated from carbon or galvanized steel. All exposed surfaces of frame to receive one coat of rust inhibitive prime paint.
- Units can be UL fire rated up to 3 hours in accordance with UL standard 10C.
- Maximum door leaf size is 4'-0" x 10'-0".
- Door weight is 19.42 pounds / sq. foot.
- Doors to be hung on continuous hinges by Overly. Locks required to be BHMA Grade 1, 2, or 3. Electrical hardware with raceways available. Consult factory for specifics.

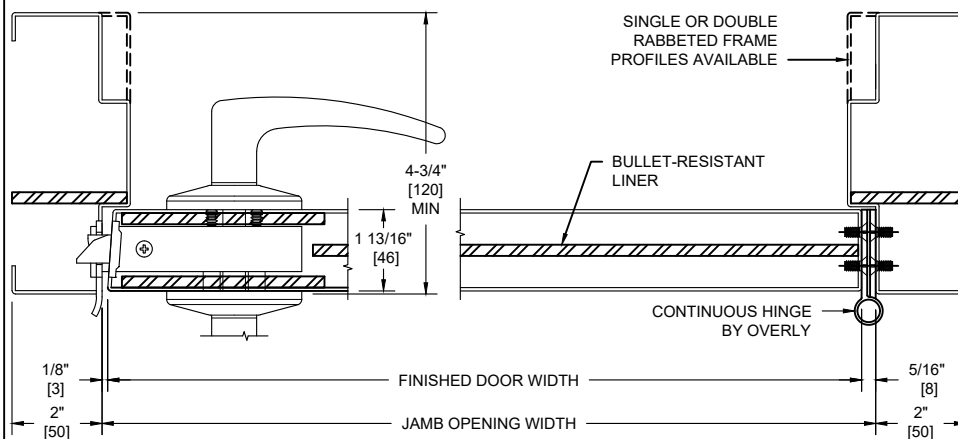

HORIZONTAL SECTION

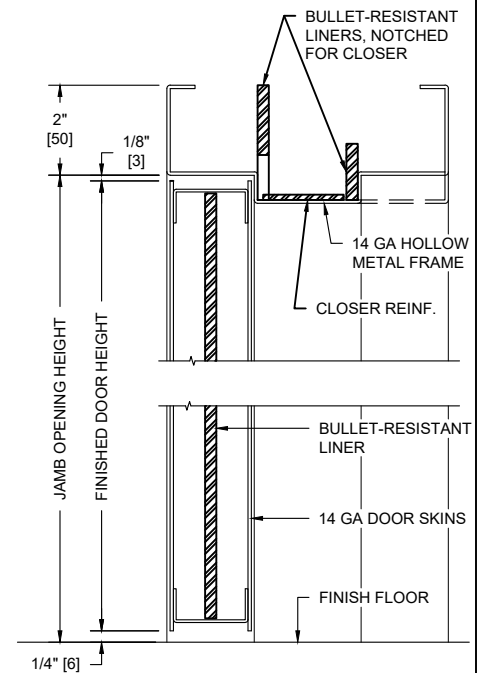

VERTICAL SECTION

UL LEVEL	AMMUNITION	MINIMUM VELOCITY FPS/MP5	NUMBER OF SHOTS
4	.30 CALIBER RIFLE LEAD CORE SOFT POINT	2540 / 774	1