




351 HARVEY AVE, SUITE B  
GREENSBURG, PA 15601  
TELEPHONE: (724) 834-7300  
www.overly.com

## BULLET RESISTANT WOOD DOOR DATA SHEET UL LEVELS 1-3

CUSTOMER: _____	APPROVED BY: _____
JOB: _____	DATE: _____
LOCATION: _____	SALES ORDER: _____ ITEM: _____
CUSTOMER PO: _____	MARK NUMBER 1: _____
_____	_____
_____	_____
_____	_____
_____	_____

### SECURE AREA (INTERIOR)




PUBLIC AREA (EXTERIOR) or (KEY SIDE)


### SWING

#### MAXIMUM LIGHT SIZES


NOTE: NO VISION LIGHTS  
WITH U.L. FIRE LABELS




#### MINIMUM STILES




#### FRAME CONFIGURATION



#### FRAME PROFILE

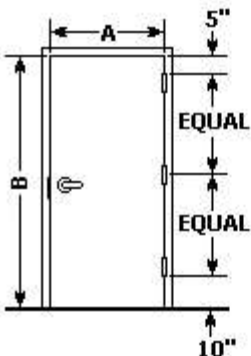

#### FRAME ELEVATION



#### DOOR ELEVATION

### DOOR INFORMATION

NUMBER OF LEAFS: \_\_\_\_\_

DOOR SWING: \_\_\_\_\_

(N) CENTER LINE (A.F.F.): \_\_\_\_\_

CENTER LINE BASED ON:

☐ LEVER ☐ DEVICE ☐ STRIKE

☐ CROSS BAR ☐ LOCK ☐ MFG STD

NOTE: If no choice is selected, the center line will be based on manufacturer's specifications.

### UL 752 LEVEL

☐ LEVEL 1 ☐ LEVEL 2 ☐ LEVEL 3

### FIRE RATING

UL LABEL: ☐ 20 MIN ☐ No Label

NOTE: No vision lights allowed with U.L. fire labels.  
All UL rated openings will meet the UL10C procedure.

### SILL INFORMATION

SILL CONDITION: \_\_\_\_\_

UNDERCUT: \_\_\_\_\_

### VENEER INFORMATION

VENEER: \_\_\_\_\_

FINISH: \_\_\_\_\_

CUT: \_\_\_\_\_

VENEER MATCHING: \_\_\_\_\_

ASSEMBLY MATCHING: \_\_\_\_\_

☐ FSC/COC REQUIRED? ☐ N/A

### VISION LIGHT INFORMATION

☐ NO VISION LIGHTS REQUIRED

(J) VISION LIGHT WIDTH: \_\_\_\_\_

(K) VISION LIGHT HEIGHT: \_\_\_\_\_

(L) HORIZONTAL CL: \_\_\_\_\_

(M) VERTICAL CL: \_\_\_\_\_

NOTE: All UL level 1-3 BR wood doors come factory glazed.

### FRAME INFORMATION

FRAME MATERIAL: \_\_\_\_\_

FRAME PRIMER: \_\_\_\_\_

FRAME CONFIGURATION: \_\_\_\_\_

FRAME ANCHORAGE: \_\_\_\_\_

(A) JAMB OPENING WIDTH: \_\_\_\_\_

(B) JAMB OPENING HEIGHT: \_\_\_\_\_

(C) JAMB DEPTH: \_\_\_\_\_

(D) WALL THICKNESS: \_\_\_\_\_

(E) JAMB TRIM: \_\_\_\_\_

(F) HEAD TRIM: \_\_\_\_\_

ROUGH OPENING: \_\_\_\_\_

WALL TYPE:

☐ METAL STUD \* ☐ WOOD STUD

☐ MASONRY/CMU ☐ CHANNEL/TUBE STEEL

\*SPLIT AND EWA ONLY: Wood blocking must be placed behind metal studs.

### HARDWARE


By: Overly Others

_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>


### ADDITIONAL NOTES:

\_\_\_\_\_


\_\_\_\_\_




CF-WLD  
WELD-IN  
FRAME




NMA  
NEW  
MASONRY  
ANCHOR



CF-BLT  
BOLT-IN  
CHANNEL  
IRON



EWA  
EXISTING  
WALL ANCHOR




SPLIT  
SPLIT FRAME




NSA  
NEW STUD  
WALL ANCHOR


### FRAME ANCHORAGE




VCT  
VCT SILL



CPT  
CARPETED OPENING



FS  
FLUSH SILL



TRS  
RAISED THRESHOLD

\*\*\*BOTTOM LINE DENOTES BOTTOM OF FRAME AT ALL CONDITIONS\*\*\*

### SILL CONDITION