BULLET RESISTANT METAL DOOR DATA SHEET UL LEVELS 1-8

OVERLY DOOR COMPANY
351 HARVEY AVE, SUITE B
GREENSBURG, PA 15601
TELEPHONE: (724) 834-7300
www.overly.com

CUSTOMER: _____ APPROVED BY: _____
JOB: _____ DATE: _____
LOCATION: _____ SALES ORDER: _____ ITEM: _____
CUSTOMER PO: _____ MARK NUMBER 1: _____ ADDITIONAL MARKS: _____

SECURE AREA (INTERIOR)



PUBLIC AREA (EXTERIOR) or (KEY SIDE)

SWING

MAXIMUM LIGHT SIZES

NOTE: NO VISION LIGHTS WITH U.L. FIRE LABELS



MINIMUM STILES



FRAME CONFIGURATION



FRAME PROFILE

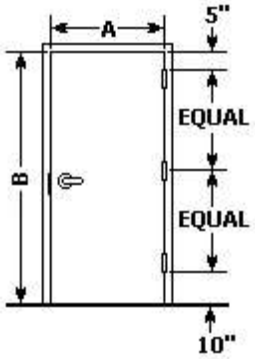

FRAME ELEVATION



DOOR ELEVATION



CF-WLD
WELD-IN FRAME



NMA
NEW MASONRY ANCHOR



CF-BLT
BOLT-IN CHANNEL IRON



EWA
EXISTING WALL ANCHOR



SPLIT
SPLIT FRAME



NSA
NEW STUD WALL ANCHOR

FRAME ANCHORAGE

DOOR INFORMATION

NUMBER OF LEAFS: _____
DOOR SWING: _____
MATERIAL: _____
PRIMER: _____
(N) CENTER LINE (A.F.F.): _____"

CENTER LINE BASED ON:
■ LEVER ☐ DEVICE ☐ STRIKE
☐ CROSS BAR ☐ LOCK ☐ MFG STD

NOTE: If no choice is selected, the center line will be based on manufacturer's specifications.

UL 752 LEVEL

☐ LEVEL 1 ☐ LEVEL 5
☐ LEVEL 2 ☐ LEVEL 6
☐ LEVEL 3 ☐ LEVEL 7
☐ LEVEL 4 ☐ LEVEL 8

FIRE RATING

■ No Label

UL LABEL: ☐ 3 HR ☐ 1-1/2 HR ☐ 3/4 HR ☐ 20 MIN

NOTE: No vision lights allowed with U.L. fire labels.
All UL rated openings will meet the UL10C procedure.

SILL INFORMATION

SILL CONDITION: _____
UNDERCUT: _____"

VISION LIGHT INFORMATION

☐ NO VISION LIGHTS REQUIRED
(J) VISION LIGHT WIDTH: _____"
(K) VISION LIGHT HEIGHT: _____"
(L) HORIZONTAL CL: _____"
(M) VERTICAL CL: _____"
GLASS PROVIDED BY: ☐ OVERLY ■ OTHERS
IF BY OTHERS, GLASS THICKNESS: _____"

FRAME INFORMATION

FRAME CONFIGURATION: _____
FRAME ANCHORAGE: _____
(A) JAMB OPENING WIDTH: _____"
(B) JAMB OPENING HEIGHT: _____"
(C) JAMB DEPTH: _____"
(D) WALL THICKNESS: _____"
(E) JAMB TRIM: _____"
(F) HEAD TRIM: _____"
ROUGH OPENING: _____"

WALL TYPE:
■ METAL STUD * ☐ WOOD STUD
☐ MASONRY/CMU ☐ CHANNEL/TUBE STEEL

*SPLIT AND EWA ONLY: Wood blocking must be placed behind metal studs.

HARDWARE

	By: Overly	Others
	☐	■
	☐	■
	☐	■
	☐	■
	☐	■
	☐	■
	☐	■
	☐	■

ADDITIONAL NOTES:



VCT
VCT SILL



CPT
CARPETED OPENING



FS
FLUSH SILL



TRS
RAISED THRESHOLD

BOTTOM LINE DENOTES BOTTOM OF FRAME AT ALL CONDITIONS

SILL CONDITION