

627 RIVERBANK DRIVE
GENEVA, IL 60134

Test Report

www.riverbankacoustics.com

630-232-0104

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

SPONSOR: **Overly Door Company**
Greensburg, PA

Sound Transmission Loss
RAL™-TL26-119

CONDUCTED: 2026-02-25

Page 1 of 10

ON: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable)

TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E90-09 (2016): "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." The single number rating of the specimen was calculated according to ASTM E413-22: "Classification for Rating Sound Insulation." A description of the measurement procedure and room specifications is available upon request. The transmission loss values are for a single direction of measurement. The results presented in this report apply to the sample as received from the test sponsor.

INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable). The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

Product Under Test

Product Name: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom
Manufacturer: Overly Door Company

SPECIMEN MEASUREMENTS & TEST CONDITIONS

Through a full external visual inspection performed on the test specimen, Riverbank personnel verified the following specimen properties:

Door Frame

Materials: Metal door frame, concrete casting at perimeter
Dimensions: Overall @ 1194 mm (47 in.) wide by 2413 mm (95 in.) high
Door frame @ 1013 mm (39.875 in.) wide by 2162 mm (85.125 in.) high
Depth: 194 mm (7.625 in.)
Overall Weight: 498.04 kg (1098 lbs)

Overly Door Company
2026-02-25

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

Door Leaf

Materials: Metal exterior, metal lockset and Overly MCL-1000 cam-lift hinges
Dimensions: 906 mm (35.6875 in.) wide by 2126 mm (83.6875 in.)
Thickness: 64 mm (2.5 in.)
Installation: Suspended from jamb of door frame via three (3) hinges
Door opens into source room
Overall Weight: Door leaf @ 166.47 kg (367 lbs)
Hinges @ 3.06 kg (6.75 lbs)
Door handle and lock @ 1.93 kg (4.25 lbs)

Additional Door Hardware

Mag Stops, Neoprene, and Mag Seal Gaskets

Materials: Metal angled pieces, neoprene, magnetic gaskets
Installation: Fastened to perimeter of door frame
Overall Weight: 20.3 kg (44.75 lbs)

S-88 Bubble Gaskets

Installation: Adhered to door side frame rabbet
Overall Weight: < 0.11 kg (0.25 lbs)

Super H Door Bottom

Materials: Solid neoprene, metal plate
Installation: Super H Door Bottom neoprene fits flush with receive room side face of door leaf via matching routed channel in door leaf
Plate fastened to receive side bottom edge of door leaf, covering neoprene
Overall Weight: 1.02 kg (2.25 lbs)

Note: The specimen was fully opened and closed five (5) times immediately prior to testing in order to demonstrate operability. No further adjustments were made to the specimen.

627 RIVERBANK DRIVE
GENEVA, IL 60134

Test Report

www.riverbankacoustics.com

630-232-0104

Overly Door Company
2026-02-25

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL26-119

Page 3 of 10

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

Overall Specimen Measurements

Dimensions: 1.01 m (39.875 in) wide by 2.16 m (85.125 in) high
Thickness: 0.19 m (7.625 in)
Weight: 690.82 kg (1523.0 lbs)
Overall Area: 2.19 m² (23.57 ft²)
Mass per Unit Area: 315.46 kg/m² (64.61 lbs/ft²)

Test Aperture

Opening Size: 1.22 m (4.0 ft.) by 2.44 m (8.0 ft.)
Filler Wall: Yes
Aperture Size: 1.01 m (39.875 in) wide by 2.16 m (85.125 in) high
Transmission Area: 2.19 m² (23.57 ft²)
Sealed: Entire periphery (both sides) with dense mastic

**Note: The dimensions used to determine the transmission area exclude those of the concrete-filled frame into which the door frame was cast. Given that the transmission loss performance of massive solid partitions is expected to be considerably greater than that of operable doors, the amount of flanking sound transmission through the mastic-covered concrete is assumed to be negligible. The specimen dimensions reflect this assumption.*

Test Environment

Source Room

Volume: 178.33 m³
Temperature: 21.7 °C ± 0.0 °C
Relative Humidity: 52.5 % ± 0.5 %

Receive Room

Volume: 131.02 m³
Temperature: 22.2 °C ± 0.0 °C
Relative Humidity: 52.5 % ± 0.5 %

Requirements

Temperature: 22° C +/- 2° C, not more than 3° C change over all tests.
Relative Humidity: ≥ 30%, not more than +/- 3% change over all tests.



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134

630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

RAL™-TL26-119

Page 4 of 10

Overly Door Company
2026-02-25



Figure 1 – Specimen mounted in test aperture, as viewed from source room (left) and receive room (right)



Figure 2 – Super H Door Bottom prior to installation

627 RIVERBANK DRIVE
GENEVA, IL 60134

Test Report

www.riverbankacoustics.com

630-232-0104

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Overly Door Company
2026-02-25

RAL™-TL26-119

Page 5 of 10

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequency bands. A graphic presentation of the data and additional information appear on the following pages. The precision of the transmission loss test data is within the limits set by the ASTM Standard E90-09 (2016). See Appendix A for identification of corrections applied to the reported data.

<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>
100	33	0.60	0	800	56	0.21	0
125	34	0.71	4	1000	54	0.17	3
160	40	0.55	1	1250	55	0.11	3
200	40	0.28	4	1600	57	0.22	1
250	44	0.33	3	2000	59	0.17	0
315	49	0.36	1	2500	59	0.12	0
400	50	0.22	3	3150	58	0.16	0
500	52	0.31	2	4000	56	0.14	2
630	55	0.24	0	5000	58	0.15	0

STC=54

ABBREVIATION INDEX

- FREQ. = 1/3 OCTAVE BAND CENTER FREQUENCY, Hz
- TL = TRANSMISSION LOSS, dB
- ΔTL = 95% CONFIDENCE INTERVAL OVER DURATION OF THIS TEST, dB
- DEF. = DEFICIENCIES, dB BELOW SHIFTED STC CONTOUR (SUM OF DEF = 27)
- STC = SOUND TRANSMISSION CLASS

Tested by

Keith Kimberling

Keith Kimberling
Test Engineer

Report by

Keith Kimberling

Keith Kimberling
Test Engineer

Approved by

Eric P. Wolfram

Eric P. Wolfram
Laboratory Manager



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE


RAL™-TL26-119

Page 6 of 10

Overly Door Company
2026-02-25

SOUND TRANSMISSION REPORT

Overly Model STC54261 I9 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable)

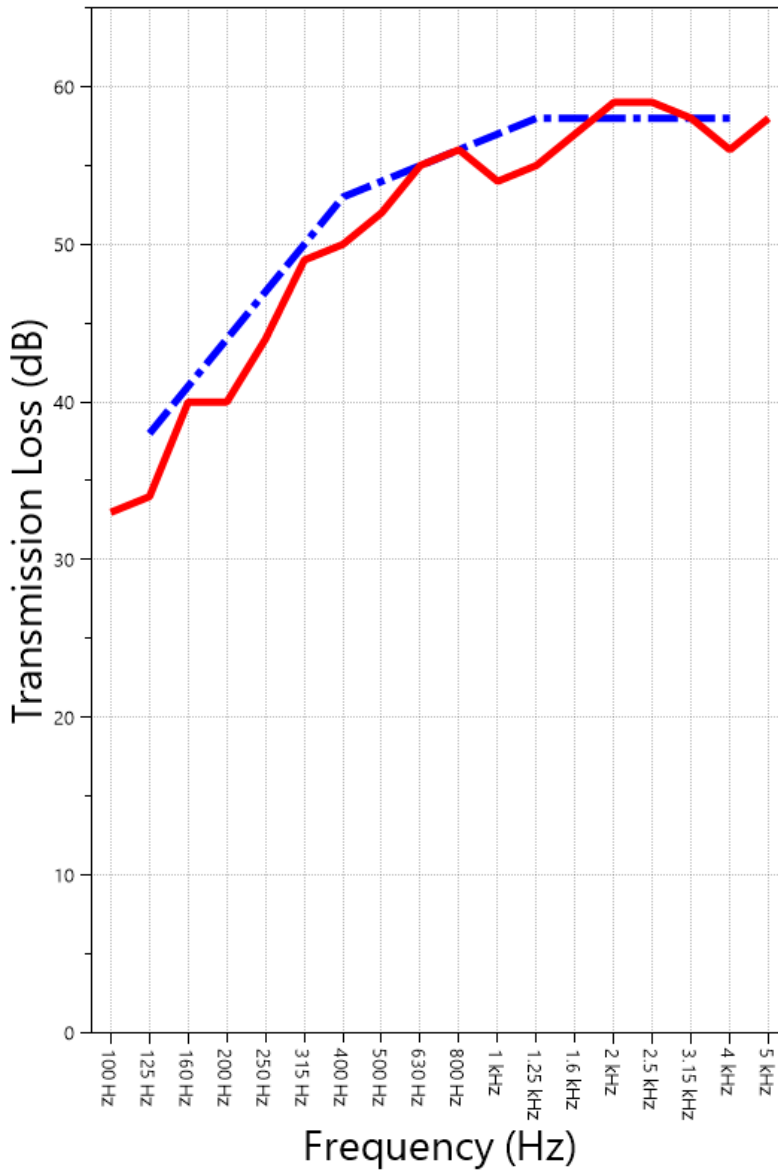

STC=54
OITC=40



TRANSMISSION LOSS
SOUND TRANSMISSION CLASS CONTOUR



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134

Test Report

www.riverbankacoustics.com

630-232-0104

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

Overly Door Company
2026-02-25

RAL™-TL26-119

Page 7 of 10

APPENDIX A: Extended Frequency Range Data

Specimen: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable) (See Full Report)

The following non-accredited data were obtained in accordance with ASTM E90-09 (2016), but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes. Sampling precision observed during this procedure is reported below. Corrections are detailed in Appendix B.

1/3 Octave Band Center Frequency (Hz)	Sound Transmission Loss (dB)	Applicable Corrections	Δ TL (Eq. A2.5) (dB)	Repeatability (dB)
31.5	27	A F	2.12	1.24
40	34	F	1.35	1.44
50	24		1.43	0.98
63	23		2.28	2.33
80	22		1.35	1.46
100	33		0.60	0.77
125	34		0.71	1.28
160	40		0.55	1.18
200	40		0.28	0.74
250	44		0.33	0.53
315	49		0.36	0.46
400	50		0.22	0.41
500	52		0.31	0.41
630	55		0.24	0.32
800	56		0.21	0.30
1000	54		0.17	0.29
1250	55		0.11	0.15
1600	57		0.22	0.18
2000	59		0.17	0.12
2500	59		0.12	0.28
3150	58		0.16	0.23
4000	56		0.14	0.18
5000	58		0.15	0.26
6300	59		0.14	0.28
8000	56		0.21	0.67
10000	50	F	0.28	0.93
12500	43	F	0.45	1.93



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

Overly Door Company

2026-02-25

APPENDIX B: Glossary of Standardized Corrections and Adjustments

Specimen: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable) (See Full Report)

Mark

Interpretation

- A* Measured sound pressure levels in the receive room are within 10 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.
- AA* Measured sound pressure levels in the receive room are within 5 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.1. Transmission Loss values calculated from levels corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and a receive room with idealized ambient sound levels of $(-\infty)$ dB.
- F* The reported Transmission Loss is within 10 dB of the laboratory flanking limit at the marked frequency band. The measured performance of the specimen may be limited by the performance of the laboratory building structure at this frequency band.
- Z* The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.7 to account for possible sound transmission through the filler assembly.
- ZZ* The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.8 to account for possible sound transmission through the filler assembly. Transmission Loss values corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and an idealized filler assembly with a Sound Transmission Class rating of (∞) .

APPENDIX C: Glossary of Variability Metrics

Specimen: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable) (See Full Report)

Δ TL, the 95% confidence interval for reported transmission loss values, is calculated from the standard deviation of the sets of measurements for source room sound pressure level, receive room sound pressure level, and receive room sound absorption. This metric is calculated in an effort to quantify the combined influences of room geometry, microphone positioning, and other varying environmental conditions on reported results.

Repeatability, expressed as a 95% confidence interval, is calculated from the standard deviation of transmission loss as obtained from a set of six (6) consecutive tests conducted according to this test method by RAL on 2020-02-24. The tests were performed on a specimen composed of welded aluminum tubing, using the same test opening as used in this report. This metric provides an estimate of the variation in results that might be observed if the test were repeated with no change to the installed specimen. Note that repeatability will vary with the construction type.

627 RIVERBANK DRIVE
 GENEVA, IL 60134
 630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
 WALLACE CLEMENT SABINE

RAL™-TL26-119

Page 9 of 10

Overly Door Company
 2026-02-25

APPENDIX D: Determination of Outdoor Indoor Transmission Class (OITC)

Specimen: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable) (See Full Report)

The determination of the Outdoor Indoor Transmission Class (OITC) as reported below was made with explicit conformity to the procedures described in the ASTM E1332-22 test standard. Test Method ASTM E90-09 (2016) was used to obtain the sound transmission loss data. This rating is based on an average transportation noise source spectrum and an A-weighted sound level reduction, either of which may be inappropriate for some applications.

One-third Octave Band Center Frequency, Hz	Reference Sound Spectrum, dB	Test Specimen Transmission Loss, dB
80	103	22
100	102	33
125	101	34
160	98	40
200	97	40
250	95	44
315	94	49
400	93	50
500	93	52
630	91	55
800	90	56
1000	89	54
1250	89	55
1600	88	57
2000	88	59
2500	87	59
3150	85	58
4000	84	56

OITC = 40



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE
GENEVA, IL 60134

Test Report

www.riverbankacoustics.com

630-232-0104

FOUNDED 1918 BY

WALLACE CLEMENT SABINE

RAL™-TL26-119

Page 10 of 10

Overly Door Company
2026-02-25

APPENDIX E: Instruments of Traceability

Specimen: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable) (See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 2	3160-A-042	3160-106974	2025-08-20	2026-08-20
Bruel & Kjaer Mic And Preamp C	Type 4943-B-001	2311439	2025-04-11	2026-04-11
Bruel & Kjaer Pistonphone	Type 4228	2781248	2025-07-21	2026-07-21
EXTECH Hygro 959	SD700	A.099959	2025-04-17	2026-04-17
EXTECH Hygro 6015	SD700	A.116015	2025-06-17	2026-06-17

APPENDIX F: Revisions to Original Test Report

Specimen: Overly Model STC5426119 Flush Metal Door with dual magnetic seals, single bubble seal, and Super H Door Bottom (operable) (See Full Report)

<u>Date</u>	<u>Revision</u>
2026-03-17	Original report issued

END



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.