
Vault Door And Day Gate Swings

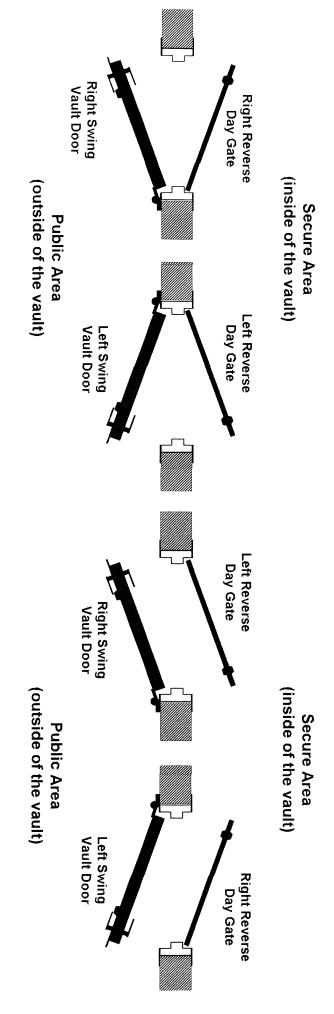

Wall Thickness:

wall and butting of materials to our frame. in the opening causing a lock-out situation. We recommend mounting the vault door frame directly to the masonry materials (i.e. gypsum board, furring strips, etc.). Over time the compressible material may allow the frame to shift Please note, Overly Door Company does not recommend mounting the vault door frame over top of compressible