

SERIES


SCW

OVERLY



DOOR COMPANY

574 WEST OTTERMAN STREET
 POST OFFICE BOX 70
 GREENSBURG, PA 15601-0070
 TELEPHONE: 724-834-7300
 FAX: 724-830-2871


MODEL NO. 4312043 / FIRE RATED / STC 43 / E90-09 / WOOD / SOUND CONTROL DOOR AND FRAME ASSEMBLY / DOUBLE BUBBLE SEALS

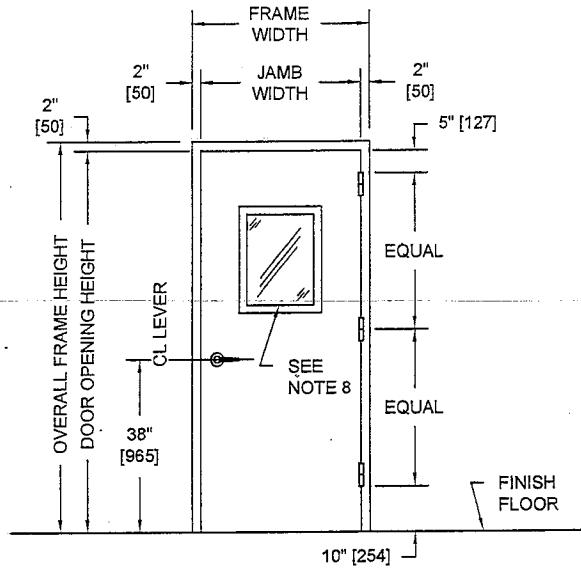

PUBLIC SIDE ELEVATION
 RIGHT HAND REVERSE BEVEL SHOWN

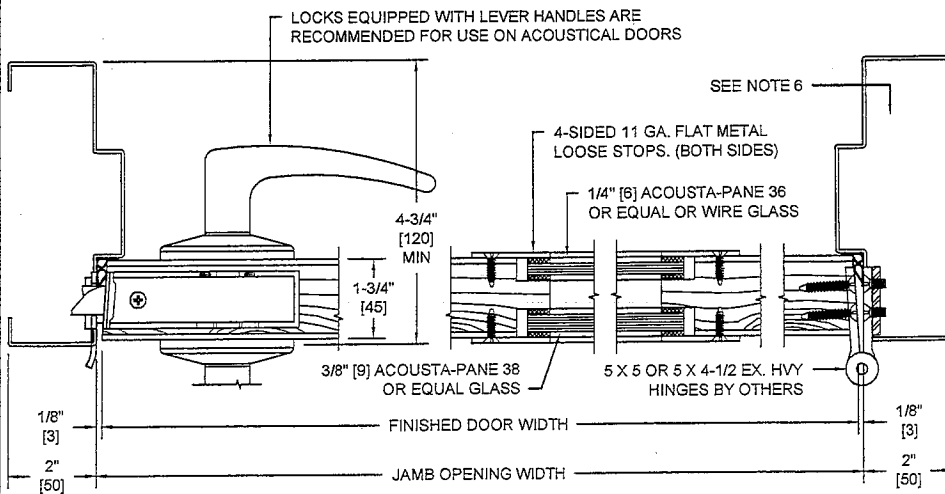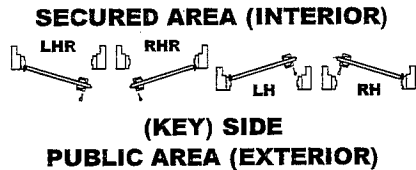

HORIZONTAL SECTION

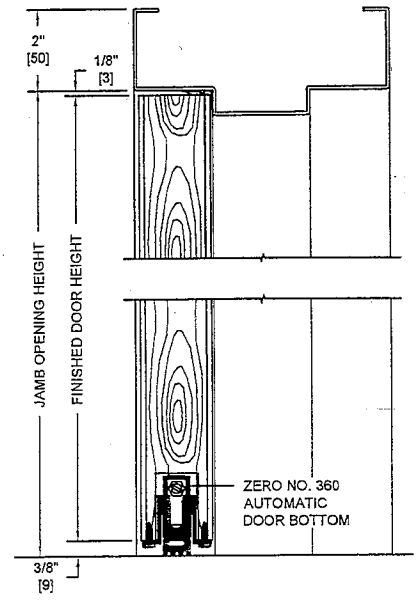

VERTICAL SECTION

NOTES:

- All exposed surfaces of frame to receive one coat of rust inhibitive prime paint.
- Door bottom requires a flush level sealing surface. Wood, aluminum, or stainless steel thresholds are recommended. Do not seal against carpet.
- Frame is equipped with double bubble seals at head and jambs.
- Door weight is 10.0 pounds per square foot.
- Door can be equipped with standard builders hardware, Customer to specify. No concealed or electrically operated hardware is permitted.
- Frames equipped with masonry anchors must be grouted full in field. Bolt-in type frames must have all voids in head and jambs packed with 6 to 12 pound density mineral wool and all voids between wall and frame continuously caulked.
- Wood species, cut and finish to be determined by the Architect.
- Unit tested as single door with a 300 sq. in. metal dual glazed vision light system at Riverbank Acoustical Laboratories. Results are described in Test Report No. TL12-043 with sound transmission results as shown in chart below.
- Up to 4' x 8' single swing units can bear up to a 45 min UL10B or UL10C/JBC7-2 fire label with up to 1,296 sq. in. vision light. Doors swinging in pairs cannot be UL fire labeled unless provided with a mullion.
- Door construction is covered by US Patent No. 6,112,496.

SOUND TRANSMISSION LOSS IN dB AT FREQUENCY / HERTZ																	
100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
32	29	30	28	33	32	37	42	44	44	43	45	47	49	50	49	49	48

ALL DIMENSIONS BOTH IN INCHES AND MILLIMETERS